


ONSIGHT 5000HD RUGGED SMART CAMERA

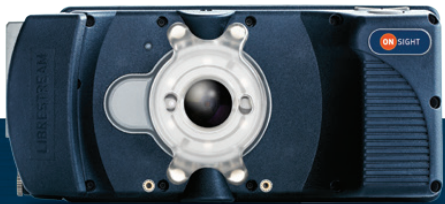

QUICK START GUIDE / REGULATORY AND SAFETY GUIDE

- INSIDE:**
- Onsight 5000HD
 - External Power Adapter
 - Wrist Lanyard
 - Multi-Port Adapter (Optional)
 - Accessory Kit including:
 - Macro Lens
 - Cleaning cloth
 - Carrying Strap and Pouch
 - Bluetooth Headset (optional)

LIBRESTREAM

ONSIGHT 5000HD QUICK START GUIDE



- | | |
|--|----------------|
| 1 Multi-Port Adapter: Micro-B USB, USB Type A & Mini HDMI (Type C) | 5 Macro Lens |
| 2 Pause | 6 Speaker |
| 3 Charging Indicator | 7 Power |
| 4 Auto Light Sensor | 8 ON (Share) |
| | 9 Touch Screen |

NOTE: The Onsight 5000HD includes 55GB of permanent storage and a built-in rechargeable battery.



- | | |
|--|---------------------|
| 10 Multi-Port Clip | 17 Microphone |
| 11 Multi-Port Connector | 18 Mic Mute |
| 12 Streaming Indicator | 19 Zoom In & Out |
| 13 Laser | 20 Power Port |
| 14 Tripod Mount | 21 Volume Up & Down |
| 15 Snapshot | |
| 16 Headset Port (Librestream Headset Only) | |

WHAT YOU NEED TO BEGIN:

- Onsight Connect User Name and Password
- Network Access Information
- Security Certificates on USB Flash Drive (if required)
- Charged Battery

Attach the external power adapter to charge the battery until the charging indicator light turns off. It will take approximately 4 hours to charge.

POWER ON

Press the Power button.

POWER OFF

Press the Power button for one second and tap Power Off on the display.

SLEEP MODE

Press the Power button to go into Sleep Mode. The display will turn off and the ON button will flash at 3 second intervals to indicate Sleep Mode. Press the Power button to wake up.


INITIAL SETUP

Use the Set up Wizard to configure the Network, Security, and Date and Time.



LOG IN

To login, enter your Onsight Connect username and password. Select 'Remember Me' to save your credentials and log in automatically next time. Note: if multiple Onsight Connect users are sharing the 5000HD, do not use 'Remember Me'.

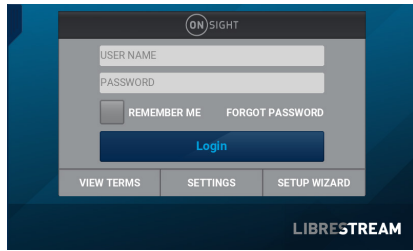

VIDEO TUTORIAL

After login, play the Onsight 5000HD Getting Started video for an overview. Replay from Help anytime.

INDICATORS / POWER

Charging Indicator:
On Charging
Off Fully Charged
(or Power Adapter disconnected)

ON button:
Blue Sharing Visuals
Flashing White Sleep Mode

Streaming Indicator LED:
On Visuals are being shared or recorded.
Off Visuals are not being shared or recorded.

FIND A CONTACT

After login, you will see Contacts. Tap the Global Search button to see all contacts in the directory. To find a new contact, enter the name in the Search box and tap the Global search button. Select the name(s) and tap the Add button (+) to include in your list.

START AN ONSIGHT CALL

To call, simply tap the contact's name.

ANSWER AN INCOMING CALL

To answer an incoming call, tap Accept on the screen.

SHARE VISUALS

To Share your live video or stored content, press the ON button.

TAKE A PICTURE

To take a picture, press the Snapshot button. To take and share a picture immediately, press and hold the Snapshot button.

END CALL

Press the End Call button on the display.

RECORD A CALL


To record, tap the Record button on the display.

GET HELP

Tap the Help button to access the User Manual and Tool Tips for more details.

Visit Librestream.com/onsight-support for more information.

ATTACH THE MULTI-PORT ADAPTER




To attach, align the Multi-Port Adapter clip with the clip on the 5000HD. Secure to the camera with the screw connector.

Use the Multi-Port Adapter to:

- Connect an external audio/video device using a Micro-B USB, USA Type A, or Mini HDMI (Type C) cables.
- Display visuals on a monitor using the type C Mini HDMI cable.
- Transfer files by connecting the Micro-B USB cable to a computer.

When the Multi-Port Adapter is not attached, you can install the cover. The cover is not required since the 5000HD is IP64 rated.

USE THE MACRO LENS



Attach the Macro Lens to capture detailed images within 3-8 cm (1–3 inches) of an object. Align the magnetic connectors with the lens guides on the front of the 5000HD.

Note: Detach the Macro Lens when finished taking close-ups. Objects farther away than 8 cm (3 inches) will appear blurry when the Macro Lens is attached.

BATTERY USE

A fully charged battery will provide up to 4 hours of continuous video streaming depending on usage and video stream settings. To reduce battery consumption press the Power button to activate Sleep mode. You can set Sleep mode to activate automatically in Settings-System-Display-Sleep.


CLEANING

Wipe off any debris/moisture with a clean lint-free cloth and a cleaning solution of either:

1. Mild soap and water, or
 2. A 50/50 mixture of isopropyl alcohol and water.
- Disinfectants such as PerCept RTU 0.5% are also approved for the body. Dry off remaining moisture with a fresh lint-free cloth.

CARRYING STRAP & POUCH

Attach the carrying strap to the Onsight 5000HD using the tripod mount. Adjust the position of the 5000HD on the body using the slider on the strap. Attach the pouch to the strap. You can store the Macro Lens in the pouch.



LIBRESTREAM

WEBSITE: www.librestream.com

HEAD OFFICE: Librestream Technologies Inc.
Suite 110, 895 Waverley St.
Winnipeg, Manitoba
Canada, R3T 5P4

GENERAL INQUIRIES:

Email information@librestream.com
Phone (Intl.) 1 (204) 487-0612
Phone (N.A.) 1 (800) 849-5507
Fax 1 (204) 487-0914

SUPPORT:


Email support@librestream.com
Phone (Intl.) 1 (204) 487-0612
Phone (N.A.) 1 (800) 849-5507

For detailed information on operating the Onsight 5000HD or Onsight Connect software, log in to access training materials at: onsight.librestream.com

For assistance contact your internal Onsight administrator or Librestream Support at support@librestream.com

GENERAL SAFETY INFORMATION


- Do not attempt to service or dismantle this equipment. All repairs must be done by an authorized Librestream service depot. Contact support@librestream.com for an authorized Librestream service depot.
- Carefully read the User Manual before operating the Onsight device.
- Use only a Librestream supplied power adapter with the equipment. Use of other adapters will void the warranty and may cause fire or explosion hazards.
- Operate the external power adapter in a well ventilated area. Do not cover the power adapter with papers or any other items as the adapter may become hot.
- If you determine that the device is hot, emits an odor, or changes color or shape, disconnect power immediately. The device must not be used again.



THIS CAUTION SYMBOL APPEARS WITHIN THE MANUALS AND ON THE PRODUCT LABEL. THE CAUTION LOGO IS USED TO DRAW ATTENTION TO IMPORTANT SAFETY CRITICAL MATTERS. WHEN THIS SYMBOL APPEARS ON THE PRODUCT LABEL, CONSULT ACCOMPANYING DOCUMENTS FOR MORE INFORMATION.

BATTERY SAFETY INFORMATION

- The Onsight device uses an internal, non-user replaceable Lithium Ion battery. Please do not attempt to disassemble the Onsight device to replace or service the battery. Please contact support@librestream.com for help with service issues.
- The battery charging temperature specification of the Onsight device is 0 C to 40 C; do not attempt to charge the battery when operating outside these temperature limits. For your safety the Onsight device will disable the battery charging when the safe charging temperature is exceeded.
- The storage temperature specification of the Onsight device is -20 C to 60 C; do not store the Onsight Device in a location where these storage temperature limits may be exceeded. Storage beyond the specified limits can result in degradation of the battery, fire or explosion.
- Do not store or leave the Onsight device near a heat source (e.g. radiator, stove, heater, automobile dashboard, etc.). The battery may explode or ignite.
- Misuse of the battery may cause them to become hot, explode, or ignite and may cause serious injury.



CAUTION! RISK OF EXPLOSION IF THE BATTERY IS REPLACED BY AN INCORRECT TYPE OR IS INSTALLED INCORRECTLY. DO NOT ATTEMPT TO SERVICE OR REPLACE THE INTERNAL BATTERY. PLEASE CONTACT LIBRESTREAM SUPPORT@LIBRESTREAM.COM FOR SUPPORT AND SERVICE.

BATTERY DISPOSAL AND RECYCLING INFORMATION


The Onsight device contains an internal Lithium-Ion battery. Recycle or dispose of the batteries according to national, state, and local regulations.

- Do not dispose the Onsight device with household or office waste.
- Do not dispose the Onsight device in a fire as the battery may explode.
- Contact your local waste disposal agency for the address of the nearest battery disposal location.

- The European Union Waste Electrical and Electronic Equipment (WEEE) Directive forbids the disposal of waste electrical and electronic equipment as unsorted municipal waste, requiring that it be collected and recycled or disposed of separately. Hazardous substances are present in electrical and electronic equipment and present potential risk to human health and environment if disposed of in municipal landfills which are not designed to prevent migration of substances into the soil and groundwater.
- Please contact support@librestream.com for help with battery disposal/recycling issues.

PRODUCT SAFETY NOTICE

The Onsight 5000HD mobile streaming camera was evaluated to IEC 60950-1, EN60950-1, UL 60950-1 and CSA C22.2 60950-1 standards and was found to be in compliance with the standard requirements.




AC ADAPTER INFORMATION

This device is supplied with an AC Adapter for charging the battery and powering the Onsight 5000HD. The following labels identify the safety approvals for the AC Adapter.



LASER SAFETY INFORMATION

This device contains a Class 1 laser for pointing and measurement.

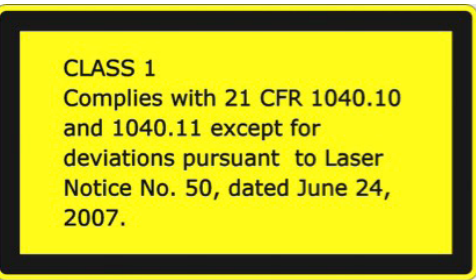

FCC RF EXPOSURE NOTICE

For body worn operation, this product has been tested and meets RF exposure guidelines when used with an accessory that contains no metal. Use of other accessories may not ensure compliance with RF exposure guidelines. No metallic accessories should be used with this device and multiple devices should not be co-located at a distance of less than 20 cm.

Warning: Changes or modifications not expressly approved by the manufacturer could void the user's authority to operate this equipment.

ISED RF NOTICE

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

License Exempt Radio Apparatus / Appareils radio exempts de licence

The device for operation in the band 5150-5250 MHz is only for indoor use ONLY, this restriction is to reduce the potential for harmful interference to co-channel mobile satellite systems.

Les dispositifs fonctionnant dans la bande 5150-5250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux.

High-power radars are allocated as primary users (i.e. priority users) of the bands 5250-5350 MHz and 5650-5850 MHz and these radars could cause interference and/or damage to LE-LAN devices.

Les utilisateurs de radars de haute puissance sont désignés utilisateurs principaux (c.-à-d., qu'ils ont la priorité) pour les bandes 5250-5350 MHz et 5650-5850 MHz et ces radars pourraient causer du brouillage et/ou des dommages aux dispositifs LAN-EL.

The maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall complies with the e.i.r.p. limit.

Le gain maximal d'antenne permis pour les dispositifs utilisant les bandes 5250-5350 MHz et 5470-5725 MHz conforme à la limite de p.i.r.e.

FCC CLASS B NOTICE

This product has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These rules are designed to provide reasonable protection against harmful interference in a residential installation. This product generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference with radio communications. However, there is no guarantee that interference will not occur in a particular installation. If the equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment on and off, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Changes or modifications that are not expressly approved by the manufacturer could void the user's authority to operate this equipment.

CE DECLARATION OF CONFORMITY

CE Declaration of Conformity (DOC) is shown on following page. The signed copy of the Declaration of Conformity is available; please contact Librestream customer support if you require a signed copy.

| | | |
|--------------------|-------------------------------------|---|
| LIBRESTREAM | EU Declaration of Conformity |  |
|--------------------|-------------------------------------|---|

Manufacturer's Name:
Librestream Technologies Inc.

Manufacturer's Address:
895 Waverley St. Suite 110
Winnipeg, MB. Canada, R3T 5P4

T: 204-487-0612
F: 204-487-0914

I the undersigned, hereby declares under sole responsibility of the manufacturer, that the product(s) as originally delivered:

Equipment Type:
Information Technology Equipment

Product Name:
Onsight Mobile Device

Model Number(s):
5000HD

complies with the essential requirements of the following applicable European Directive and carries the CE marking accordingly:

RED Directive 2014/53/EU

The above device has been tested and found to comply with the following harmonized standard(s):

EMC & RADIO:
EN 55032:2012+AC:2013 CLASS B
ETSI EN 300 330 V2.1.1 (2016-11)
ETSI EN 301 489-1 V1.9.2 (2011-09)
ETSI EN 301 489-17 V2.2.1 (2012-09)
ETSI EN 300 328 V2.1.1 (2017-01)
ETSI EN 301 893 V2.0.7 (2016-11)

SAFETY:
EN 60950-1:2006/A2:2013-08
IEC 60950-1 + AMD1:2009 + AMD2:2013
EN 62479:2010

APPLICANT:
Signature:Original Signed document is available upon request

Full Name:
Gilles Aminot, P.Eng

Title:
Hardware Engineering Manager

Place of Issue:
Winnipeg MB. Canada

Date of Issue:
February 23rd, 2017

Full Address:
Suite 110, 895 Waverley St
Winnipeg, Manitoba
Canada, R3T-5P4
Phone #: 204-487-0612
Fax #: 204-487-0914

WEE INFORMATION

Information on collection and recycling arrangements for Librestream customers can be found at www.librestream.com/recycling

DOCUMENT INFORMATION

Librestream Onsight 5000HD Regulatory and Safety Guide
Doc #: 400294-00 Rev 01
April 2017

Information in this document is subject to change without notice. Reproduction in any manner whatsoever without the written permission of Librestream is strictly forbidden.

Copyright © 2017
Librestream Technologies Incorporated.
All rights reserved.

Name of Librestream Product:
Onsight 5000HD



Copyright Notice:
Copyright 2004 - 2017 Librestream Technologies Incorporated. All Rights Reserved.

Patents Notice:
United States Patent # 7,221,386, together with additional patents pending in Canada, the United States and other countries, all of which are in the name of Librestream Technologies Inc.

Trademark Notice:
Librestream, the Librestream logo, Onsight, Onsight Connect, Onsight Expert, Onsight Mobile, Onsight Platform Manager, and Onsight Management Suite are either registered trademarks or trademarks of Librestream Technologies Incorporated in Canada, the United States and/ or other countries. All other trademarks are the property of their respective owners.

LIBRESTREAM CONTACT INFORMATION

Website: www.librestream.com

Head Office
Librestream Technologies Inc.
Suite 110, 895 Waverley St.
Winnipeg, Manitoba
Canada, R3T 5P4

General Inquiries
Email contact@librestream.com
Phone (204) 487-0612
Fax (204) 487-0914

Support
Email support@librestream.com
Phone (800) 849-5507
Fax (204) 487-0914